


This product is used for Telecommunication feeder connector sealing and protection.

Part list

- 1 : Silicone tube
- 2 : Inner liner

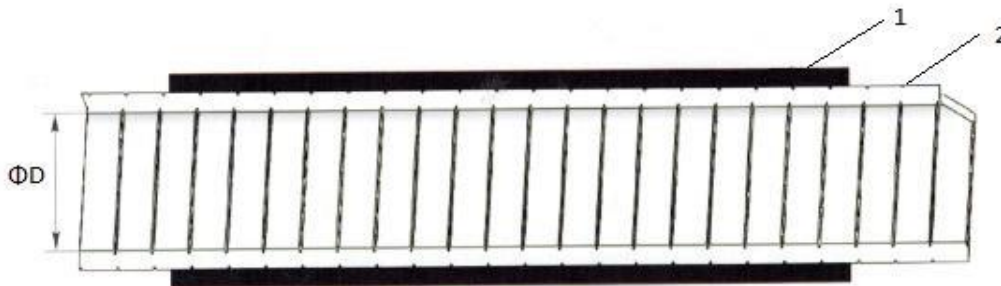

Part number

RLCST-XX/XX-XXX-BK

Material

Inner liner

Cold shrink tube

Silicon, Black

PE, White

PN	Inner diameter ØD (mm)	Tube length L(mm)	Suitable diameter, Min/Max(mm)	Suitable connectors
RLCST-40/08-200-BK	40	200	10 / 34	N, 7-16, 4.3-10, AISG
RLCST-30/08-125-BK	30	125	8 / 25	N, 4.3-10, AISG
RLCST-25/06-200-BK	25	200	6 / 20	AISG

* "XXX" indicate the rubber tube length, it is available for different requirement.

* The Tube thickness (T) and length value (L) are both after extracting situation

* The Tube thickness (T), inner diameter (ΦD) and Tube length (L) oversize are acceptable

Data Sheet

Rosenberger

Cold Shrink Tube

RLCST-xx/xx-XXX-BK

Technical data

Shore hardness (A)	40, GB/T531
Tensile strength	7.16Mpa, GB/T528
Elongation at break	670%, GB/T 528
Tear strength	30kN/m, GB/T529

Environment data

Temperature range	-40°C ~90°C
Flammability	UL94 V2
UV Resistance (1000h)	Grey level 4, ASTM G154-06
Water resistance	IP67, IEC 60529
2002/95/EC (RoHS)	Compliant
CPR	n.a.

Packing

Standard 16 pcs/ bag or according to the requirement

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Installation

Cold Shrink Tube Installation Video Available Online:



Draft	Date	Checker	Approved	Date	Rev.	Engineering change number	Name	Date
WG.Z	24/10/2014	Sky	J.G.	24.06.24	301	24-RL031	Herbert	24.06.24

Rosenberger Hochfrequenztechnik GmbH & Co. KG Tel.: +49 8684 18-0 www.rosenberger.de	Fax: +49 8684 18-499 email : info@rosenberger.de	Rosenberger Technology (Kunshan) Co., Ltd. Tel.: +86 512 86896789 www.rosenbergerap.com	Fax: +86 512 8689 0666 email: info@rosenbergerap.com	Page 2 / 2
--	--	--	---	---------------